

## VENT STACK ODOR ELIMINATOR

For residential and commercial vent stacks

Offensive odors including hydrogen sulfide gas are produced in residential & commercial drain pipes and septic systems. The **Sweet Air™** vent filter is your answer to eliminate plumbing or septic odors. **Sweet Air™** is inexpensive and can be easily installed on existing vent stacks. Activated carbon "scrubs" the vent discharge putting an end to unpleasant odors from house, septic, and portable toilet vents.



## STOP OFFENSIVE ODORS



from sewer and septic tank vent stacks that drift onto patios and into windows with **Sweet Air™** Odor Eliminator.

### THE SWEET AIR™ SYSTEM



- **UV stabilized, Hi-Impact ABS construction**
- a** Twist Top Cap for easy activated carbon maintenance
- b** Vented lid and chamber
- c** Vents for unrestricted airflow
- d** Activated carbon mesh pouch in chamber
- e** Ventilated chamber bottom with universal connector fits 3" or 4" Schedule 40 vent stack
- **Easy no-tool installation**
- **No more offensive odors**
- **No more spoiled patio parties**
- **No more foul air drifting into open windows**



### HOW IT WORKS

1. Unpleasant odors raise from house or septic stack vent
2. Odors pass thru activated carbon which "scrubs" and removes odor
3. Clear, odor-free air leaves **Sweet Air™** Odor Eliminator



Attractive, at-a-glance packaging that quickly and thoroughly tells the **Sweet Air™** story.

Rørstuds Ø75







Rørstuds Ø110



**Inden filteret tages i brug:** Skal toppen tages af - Kullet hældes ud af plastikposen – Top på igen – Klar!

- Filteret kan blandt andet bruges til sikker udluftning af septiktanke, bundfældningstanke, mini rensningsanlæg etc.
- Filteret skal monteres så det står lodret.
- Let montering, se billeder. Kullet skiftes let.
- De viste rørmuffer fås hos trælasten og de har pakning i begge ender der slutter tæt til udluftningsrøret og filteret.
- Hvis udluftningsrøret har en såkaldt svane Hals skæres den væk, så filteret kan monteres lodret.
- Indeholder ca. 220 gram kul piller - Holdbarhed ca. 2 år dog alt afhængig af belastning
- Passer til rørstuds Ø75, Ø110 (indvendig mål)

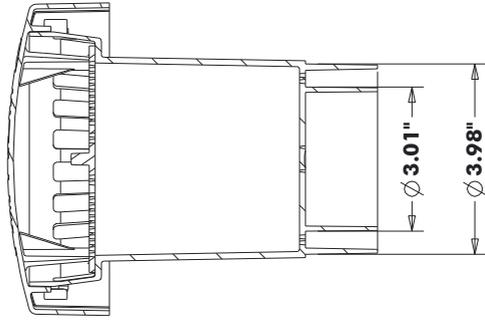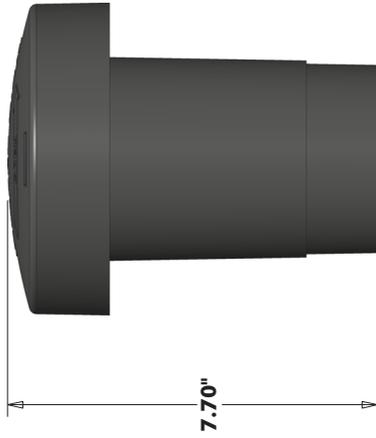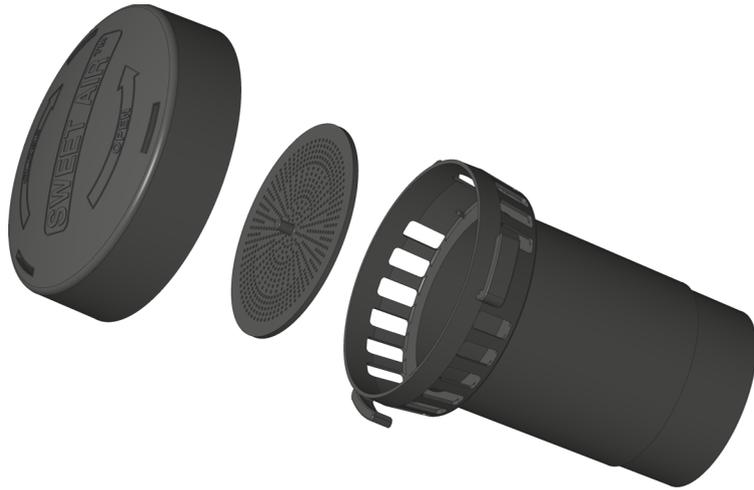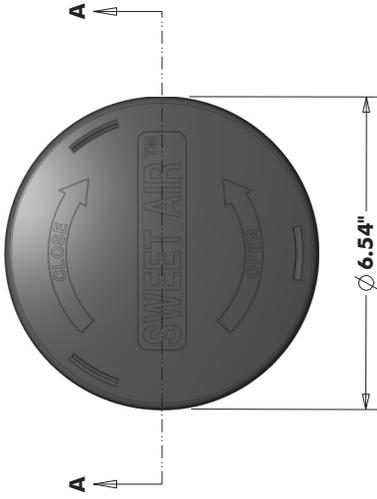

SECTION A-A

## Drainage and Septic Products

Tuf-Tite, Inc.  
 1200 Flex Court  
 Lake Zurich, Illinois 60047

TELEPHONE: 847.550.1011  
 TOLL FREE: 800.382.7009  
 FAX: 847.550.8004

**PART NAME:** SWEET AIR VENT

**PART #:** VS43-4

